


EN 60598-2-22 - EN 50018  
230V 50/60 Hz - IP67 - IK07

ANTIDEFLAGRANTE  
EXPLOSION PROOF  
EXPLOSIONSSICHER



CATEGORIA 2 secondo ATEX 94/9/CE  
CATEGORY 2 as per ATEX 94/9/CE  
KATEGORIE 2 gemäß ATEX 94/9/CE

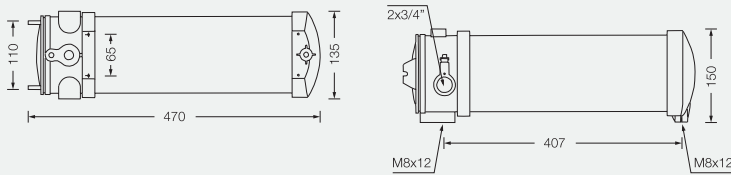

	Ref.	Lm				
<b>SOLO EMERGENZA</b>	<b>1LE EX 200</b>	220 lm	PL-S 9W/84	1 h	4,8 V · 1,5 Ah NiCd	1
<b>NON-MAINTAINED</b>	<b>1LE EX 400</b>	410 lm	PL-S 11W/84	1 h	4,8 V · 4,0 Ah NiCd	1

**BEREITSCHAFT**

	Ref.	Lm				
<b>AUTOTEST</b>	<b>1 LE EXA 200</b>	220 lm	PL-S 9W/84	1 h	4,8 V · 1,5 Ah NiCd	1
<b>AUTOTEST</b>	<b>1 LE EXA 400</b>	410 lm	PL-S 11W/84	1 h	4,8 V · 4,0 Ah NiCd	1

**SELBSTTEST**

	Ref.	Lm				
<b>SISTEMA WIRELESS</b>	<b>1 LE EXI 200R</b>	220 lm	PL-S 9W/84	1 h	4,8 V · 1,5 Ah NiCd	1
<b>WIRELESS SYSTEM</b>	<b>1 LE EXI 400R</b>	410 lm	PL-S 11W/84	1 h	4,8 V · 4,0 Ah NiCd	1

**DRAHTLOS**

	Ref.	Lm				
<b>SISTEMA CABLATO</b>	<b>1 LE EXI 200</b>	220 lm	PL-S 9W/84	1 h	4,8 V · 1,5 Ah NiCd	1
<b>WIRED SYSTEM</b>	<b>1 LE EXI 400</b>	410 lm	PL-S 11W/84	1 h	4,8 V · 4,0 Ah NiCd	1

**KABELSYSTEM**

