




1TCTB081

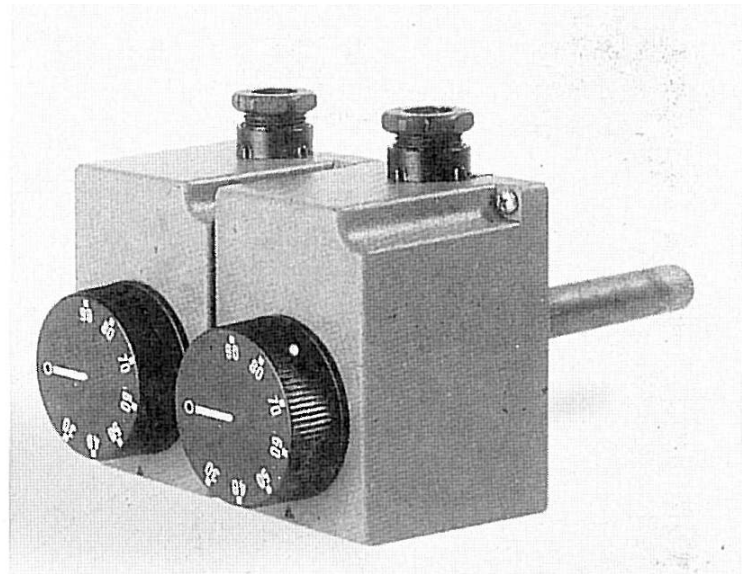

TERMOSTATO REGOLABILE

Scala temperatura: 30° - 90°C

Questo termostato viene installato con il sistema a immersione per il controllo e la regolazione di temperatura delle caldaie per riscaldamento.

TERMOSTATO DI SICUREZZA A RICARICA MANUALE

Applicazioni tipiche

Caldaie, e ovunque occorra una sicurezza con ripristino manuale.

Temperature di intervento

A richiesta del Cliente. (Standard 95°C)

SCALE TEMPERATURA TEMPERATURE RANGE	MAX TEMPERATURA AMMESSA SUL TERMOSTATO MAX WORKING TEMPERATURE ON THE THERMOSTAT	MAX TEMPERATURA AMMESSA SUL BULBO MAX WORKING TEMPERATURE ON THE BULB
30° - 90°C	T 100	99°C

ADJUSTABLE THERMOSTAT

Temperature range: 30° - 90°C

This thermostat is normally installed, with immersion system (acquastat), on boilers for central heating application.

MANUAL RESET THERMOSTAT

Typical applications

Boilers for central heating, and where is requested a manual reset safety device.

Temperatures setting

They are according to the Customer request. (Standard 95°C)

CARATTERISTICHE ELETTRICHE SWITCH RATING

RESISTIVO	{	16A	250V
RESISTIVE		10A	380V
INDUTTIVO	{	5A	220V
INDUCTIVE		1A	380V

TERMINALI FASTON 6,3 mm CON MORSETTI A VITE
TAB TYPE 1/4 FASTON WITH SCREWS TERMINALS



SCHEMA ELETTRICO ELECTRICAL DIAGRAM

VERSIONE CONTATTI IN
COMMUTAZIONE DT
DOUBLE THROUGH
VERSION DT

